


SPECKTRON

DKS2-43 AP

43" Digital Kiosk

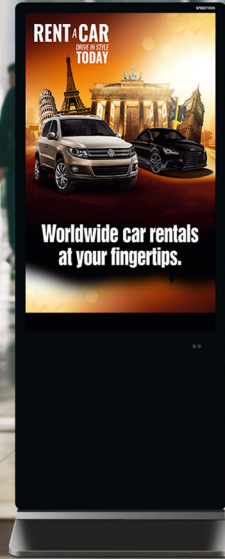

- Capacitive multi-touch interactive display
- Freestanding slim line design
- Protective glass fascia & built-in speakers
- 43" Full HD Portrait Display
- Integrated Android system
- Supports superior video content & applications



FULL
HD



SLEEK
DESIGN



USB
CONNECTIVITY



MULTI
TOUCH



RETAIL



LEISURE



HOSPITALITY



HEALTHCARE



GOVERNMENT



MALLS



AIRPORTS

DKS2-43 AP



Specktron's 43" Digital Kiosk is the ideal solution for a variety of environments, such as hospitality, retail, airports & public spaces. Featuring Ultra HD resolution, 178°/178° wide-angle viewing, 350-nit brightness, 1300:1 contrast ratio, 24/7 operation, capacitive to deliver messages with vivid clarity in a sleek, slim design. Photo and video files can be played back using the Quad-core media player and 8GB of internal memory.

SPECIFICATIONS

PANEL		MAINBOARD FEATURES	
Panel Size	43"	Operating system	Android 6.0
Max-Resolution(H x W)	1920 x 1080	CPU	Quad Core, Cortex A-17
Viewing angle	178°	Memory	2 GB DDR3 RAM
Display colors	16.7 M	Storage	8 GB
Brightness	350 cd/m ²	Internet connection	Wi-Fi and LAN
Contrast ratio	1300:1	SD Card Support	Yes
Response time	8ms	Google Play Support	Yes
Display model	9:16	Scheduled On/ Off power	Yes
24/7 Operation	Yes	Inputs	HDMI-IN x 1, USB ports x 2, Touch x 1, RJ 45 x 1
Speakers	2 x 5W	Outputs	HDMI-OUT x 1
TOUCH		CMS	Supports pushing content and remote management of unit
Touch frame	PCAP	CERTIFICATIONS	
Touch points	10	CE	Yes
SUPPORT MODES		RoHS	Yes
Video format	AVI(H.264, DIVX, DIVX, XVID), rm, rrmvb, MKV(H.264, DIVX, DIVX, XVID), WMV, MOV, MP4(H.264, MPEG, DIVX, XVID), DAT(VCD format), VOB(DVD format), PMP, MPEG, MPG, FLV(H.263, H.264), ASF, TS, TP, 3GP, MPG	PRODUCT DIMENSIONS	
Audio format	MP3, WMA, MP2, OGG, AAC, M4A, MA4, FLAC, APE, 3GP, WAV.	Dimensions	1810 x 450 x 593 mm
Picture format	BMP/PNG/GIF/JPEG	Weight	40 KG
Text format	PDF, WORD, PPT, TXT, EXCEL	Operating temperature	0°C~50°C
POWER		Operating humidity	10%-90%
Power Supply	AC 100~240V 50 /60 HZ	Storage temperature	-20°C~60°C
Power Consumption	100W	Storage humidity	10%-90%
Standby	<5W		

*Model subject to availability in your region.